

RESOLUTION 1920 x 1080	THROW RATIO 1.13~1.47
THROW DISTANCE 4.9 - 28.8 ft / 1.5 - 8.8 m	BRIGHTNESS (LUMENS) 3,500 ANSI

DISPLAY	
TYPE DLP Laser	RESOLUTION TYPE HD (1920x1080)
RESOLUTION 1920 x 1080	BRIGHTNESS (LUMENS) 3,500 ANSI
DISPLAY SIZE (IN.) 60 - 300 in. / 1.5 - 7.6 m	THROW DISTANCE 4.9 - 28.8 ft / 1.5 - 8.8 m
THROW RATIO 1.13~1.47	KEystone Vertical (± 40°) / Horizontal (± 40°)
LENS 1.3x Manual optical zoom / manual optical focus	LIGHT SOURCE LIFE, NORMAL (HOURS) 20000
LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 20000	COLOR DEPTH 1.07B Color (R/G/B 10bit)
DYNAMIC CONTRAST RATIO 3,000,000:1	ASPECT RATIO 16:9

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102KHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1080	MAC® RESOLUTION (MAX) 1920 x 1080

CONNECTOR

USB 2.0 TYPE A 1	ETHERNET LAN (RJ45) 1
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 1
CONTROL (RS232) 1	HDMI 1.4 (WITH HDCP 1.4) 2
VGA IN 2	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	MINI USB 1

AUDIO

INTERNAL SPEAKERS 2W (x1)	
-------------------------------------	--

POWER

VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 260W
STAND-BY <0.5W	

CONTROLS

PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
---	--

OPERATING CONDITIONS

TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%
---	---

ADDITIONAL HARDWARE	
----------------------------	--

KENSINGTON LOCK SLOT 1	
----------------------------------	--

WEIGHT (IMPERIAL)	
--------------------------	--

NET (LBS) 15.7	GROSS (LBS) 20.1
--------------------------	----------------------------

WEIGHT (METRIC)	
------------------------	--

NET (KG) 7.1	GROSS (KG) 9.1
------------------------	--------------------------

DIMENSIONS (IMPERIAL) (WXHxD)	
--------------------------------------	--

PACKAGING (IN.) 19.7 x 6.2 x 15.8	PHYSICAL (IN.) 15.6 x 6.2 x 12.4
---	--

DIMENSIONS (METRIC) (WXHxD)	
------------------------------------	--

PACKAGING (MM) 500.4 x 157.5 x 401.3	PHYSICAL (MM) 396.0 x 157.0 x 314.0
--	---


GENERAL	
----------------	--

REGULATIONS FCC, cTUVus, ROHS	PACKAGE CONTENTS LS700HD Projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide
---	---

WARRANTY Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).	
---	--

DIMENSIONS

15.6 x 12.4 x 6.2 in / 396.0 x 314.0 x 157.0 mm

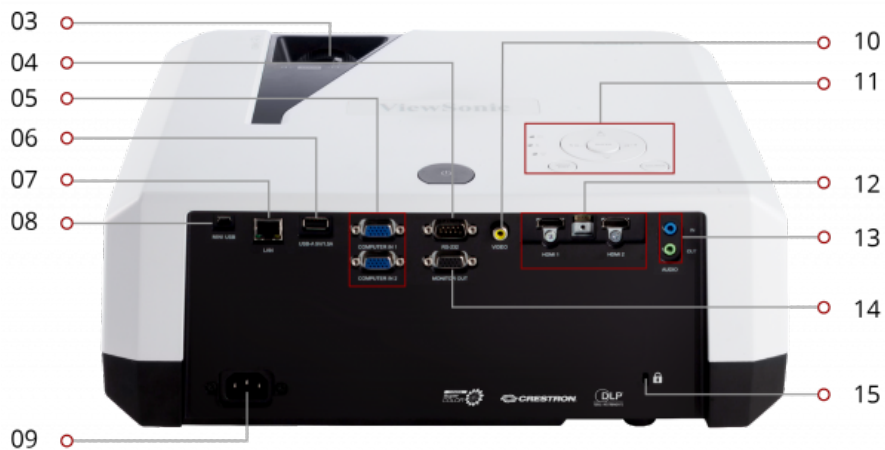

01 Projection Lens 02 IR Remote Sensor 03 Focus/Zoom Rings 04 RS-232 05 Computer In 06 USB 5V/1.5A Out 07 LAN 08 Mini USB
 09 AC In 10 Composite 11 Control Panel 12 HDMI (x2) 13 Audio In/Out 14 Monitor Out 15 Kensington® Lock Slot