

RESOLUTION 1024 x 768	THROW RATIO 1.41 ~ 2.25
THROW DISTANCE 2.3 – 37.3 ft. / 0.86 – 11.36 m	BRIGHTNESS (LUMENS) 5,200 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE XGA (1024x768)
RESOLUTION 1024 x 768	BRIGHTNESS (LUMENS) 5,200 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 2.3 – 37.3 ft. / 0.86 – 11.36 m
THROW RATIO 1.41 ~ 2.25	KEYSTONE Vertical (± 30°) / Horizontal (± 30°)
LENS 1.6x Manual optical zoom / manual optical focus	LIGHT SOURCE (WATT) 370
LIGHT SOURCE LIFE, NORMAL (HOURS) 2000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 2500
COLOR DEPTH 30 bits, 1.07B Color (10+10+10)	ASPECT RATIO 4:3 (native)

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15–100KHz	FREQUENCY VERTICAL 24–120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) Up to 1920x1080	MAC® RESOLUTION (MAX) Up to 1920x1080 (may require MAC adapter)

CONNECTOR	
USB 2.0 TYPE A 1	ETHERNET LAN (RJ45) 1
3.5MM 12V TRIGGER 1	3.5MM AUDIO OUT 1
3.5MM AUDIO IN 2	CONTROL (RS-232) 1
HDMI 1.4 3	HDMI MHL 1
VGA IN 2	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	S-VIDEO IN 1
MINI USB 1	MICRO USB 1
RCA AUDIO IN (L/R) 1	

AUDIO	
INTERNAL SPEAKERS 10W (x2)	

POWER	
VOLTAGE 100~240VAC (Auto Switching), 50-60Hz (universal)	CONSUMPTION (MAX) 570W
STAND-BY <0.5W	

CONTROLS	
PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information


OPERATING CONDITIONS**TEMPERATURE**
32-104° F (0 - 40° C)**HUMIDITY (NON-CONDENSING)**
0-90%**NOISE LEVEL****ECO-MODE**
33dB**ADDITIONAL HARDWARE****KENSINGTON LOCK SLOT**
1**WEIGHT (IMPERIAL)****NET (LBS)**
13.89**GROSS (LBS)**
23.81**WEIGHT (METRIC)****NET (KG)**
6.3**GROSS (KG)**
10.8**DIMENSIONS (IMPERIAL) (WXHxD)****PACKAGING (IN.)**
22.72 x 21.14 x 10.24**PHYSICAL (IN.)**
19.55 x 12.45 x 5.5**DIMENSIONS (METRIC) (WXHxD)****PACKAGING (MM)**
577 x 537 x 260**PHYSICAL (MM)**
496.5 x 316.2 x 139.8

GENERAL

<p style="text-align: center;">AV CONTROL</p> <p>AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified</p>	<p style="text-align: center;">REGULATIONS</p> <p>Mexico Energy test/Registration, EAC, TUV-S Mark (Argentina), India BIS, FCC, CE, EMC, CB, CCC, RoHS, REACH, SVHC, WEEE, ErP, Mexico NOM, cTUVus, PSB, RCM, CECP</p>
<p style="text-align: center;">PACKAGE CONTENTS</p> <p>Pro8510L projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide), Cable management cover</p>	<p style="text-align: center;">WARRANTY</p> <p>Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).</p>
<p style="text-align: center;">RECYCLE/DISPOSAL</p> <p>Please dispose of in accordance with local, state or federal laws.</p>	

DIMENSIONS

19.55 x 12.45 x 5.5 in. / 496.5 x 316.2 x 139.8 mm

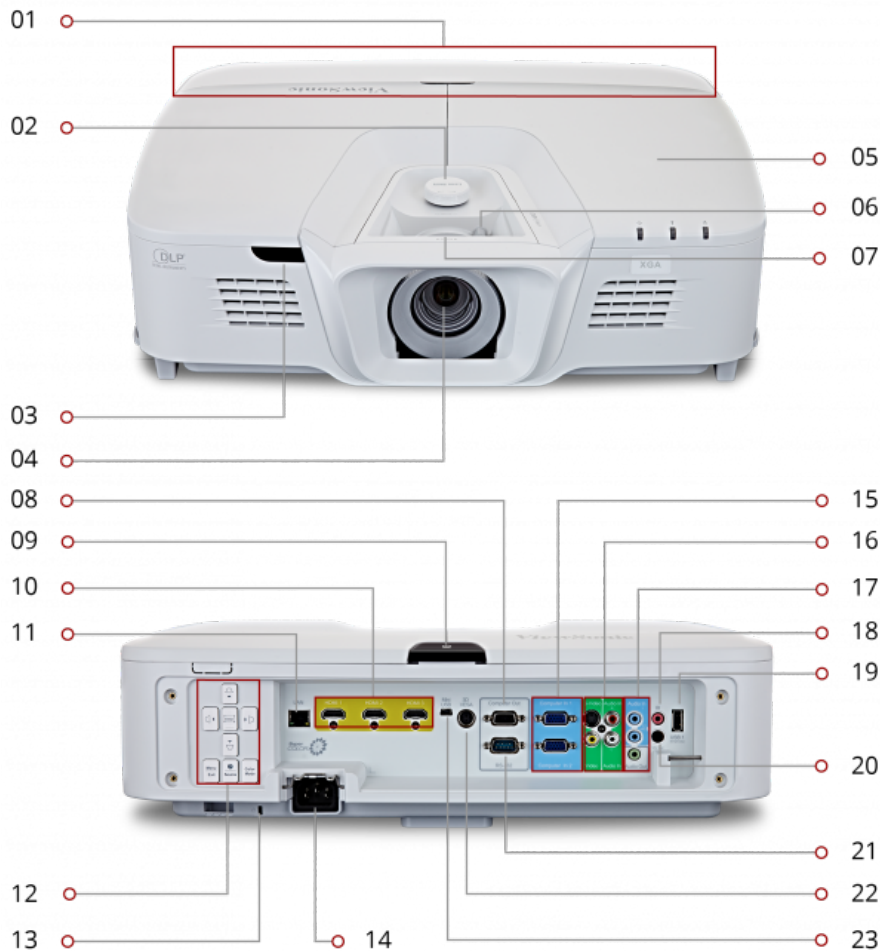

Cable Management Vertical Lens Shift IR Remote Sensor Projection Lens PortAll™ (HDMI/MHL) Zoom ring
 Focus ring Monitor Out Power Switch HDMI (x3) LAN Menu Controls Kensington® Lock Slot AC In VGA (x2)

Audio/Video In Audio In/Out IR Passthrough USB 12V DC Trigger RS232 3D VESA USB type Mini B