

RESOLUTION 1920 x 1200	THROW RATIO 1.07~1.71:1
THROW DISTANCE 2.26~36.25 ft / 0.69~11.05 m	BRIGHTNESS (LUMENS) 5,200 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WUXGA (1920x1200)
RESOLUTION 1920 x 1200	BRIGHTNESS (LUMENS) 5,200 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 2.26~36.25 ft / 0.69~11.05 m
THROW RATIO 1.07~1.71:1	KEystone Vertical (± 30°) / Horizontal (± 30°)
LENS 1.6x Manual optical zoom / manual optical focus	LIGHT SOURCE (WATT) 370
LIGHT SOURCE LIFE, NORMAL (HOURS) 2000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 2500
COLOR DEPTH 30 bits, 1.07B Color (10+10+10)	ASPECT RATIO 16:10
LENS SHIFT Vertical (+/-2.5 - 5%)	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15-100kHz	FREQUENCY VERTICAL 24-120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920x1200	MAC® RESOLUTION (MAX) 1920x1200

CONNECTOR

ETHERNET LAN (RJ45) 1	3.5MM 12V TRIGGER 1
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 3
CONTROL (RS232) 1	HDMI 1.4 3
HDMI MHL 1	VGA IN 2
VGA OUT 1	COMPOSITE RCA VIDEO IN 1
S-VIDEO IN 1	MICRO USB 1
RCA AUDIO IN (L/R) 1	3D VESA 1
WIRED REMOTE OUT 1	5-BNC 1

AUDIO

INTERNAL SPEAKERS 10W (x2)

POWER

VOLTAGE 100~240VAC (Auto Switching), 50-60Hz (universal)	CONSUMPTION (MAX) 574W
STAND-BY <0.5W	

CONTROLS

PHYSICAL CONTROLS Display, Image, Power Management, Basic, Advanced, System, Information	ON SCREEN DISPLAY Power, lens shift, focus, zoom, keystone/arrow keys, left/blank, right/panel key lock, menu/exit, mode/enter, source
--	--

OPERATING CONDITIONS

TEMPERATURE 41-104° F (5 - 40° C)	HUMIDITY (NON-CONDENSING) 10-85%
---	--

ADDITIONAL HARDWARE

KENSINGTON LOCK SLOT 1	
----------------------------------	--

WEIGHT (IMPERIAL)

NET (LBS) 13.89	GROSS (LBS) 23.81
---------------------------	-----------------------------

WEIGHT (METRIC)

NET (KG) 6.3	GROSS (KG) 10.8
------------------------	---------------------------

DIMENSIONS (IMPERIAL) (WXHxD)

PACKAGING (IN.) 22.72 (W) x 21.14 (D) x 10.24 (H)	PHYSICAL (IN.) 19.55 (W) x 12.45 (D) x 5.50 (H)
---	---


DIMENSIONS (METRIC) (WXHxD)

PACKAGING (MM) 577 (W) x 537 (D) x 260 (H)	PHYSICAL (MM) 496.5 (W) x 316.24 (D) x 139.8 (H)
--	--

GENERAL	
<p>AV CONTROL</p> <p>AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified</p>	<p>REGULATIONS</p> <p>EAC, TUV-S Mark(Argentina), India BIS, FCC,CE EMC, CB,CCC, ROHS, REACH, SVHC, WEEE, ErP, Mexico NOM, cTUVus, RCM, CECP</p>
<p>PACKAGE CONTENTS</p> <p>Pro8800WUL projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)</p>	<p>WARRANTY</p> <p>Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).</p>
<p>RECYCLE/DISPOSAL</p> <p>Please dispose of in accordance with local, state or federal laws.</p>	

DIMENSIONS

19.55 x 12.45 x 5.50 in / 496.5 x 316.24 x 139.8 mm

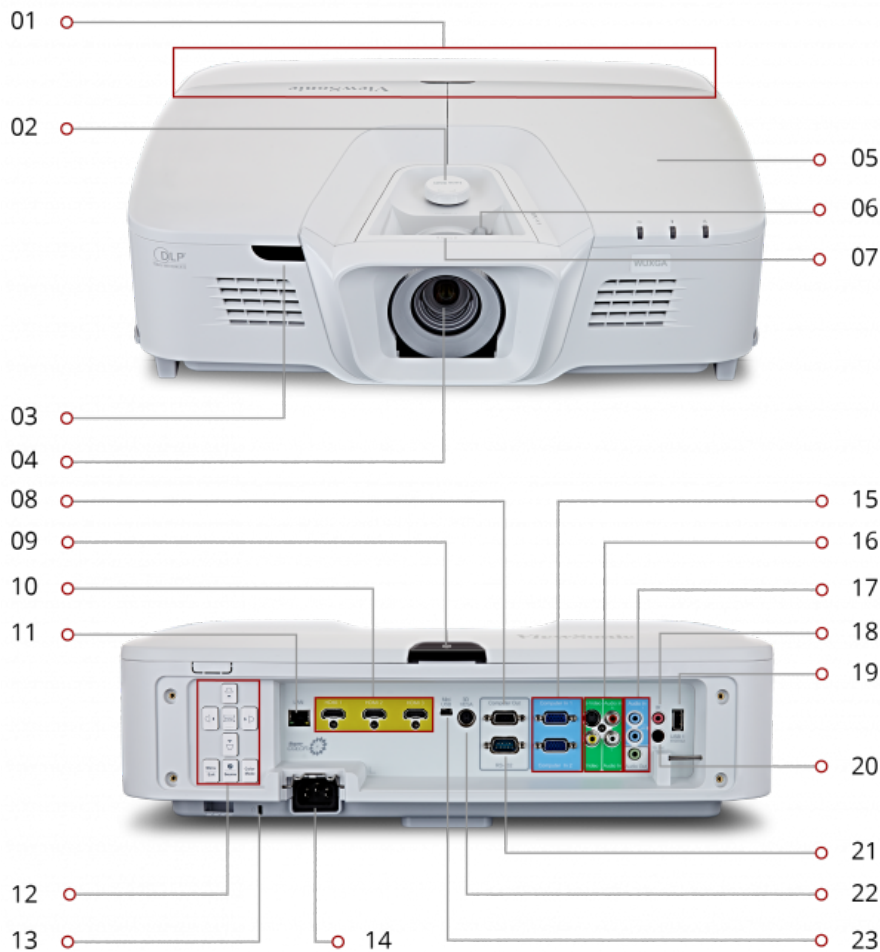

Cable Management Vertical Lens Shift IR Remote Sensor Projection Lens PortAll™ (HDMI/MHL) Zoom ring
 Focus ring Monitor Out Power Switch HDMI (x3) LAN Menu Controls Kensington® Lock Slot AC In VGA (x2)

Audio/Video In Audio In/Out IR Passthrough USB 12V DC Trigger RS232 3D VESA