

RESOLUTION 1920 x 1080	THROW RATIO 1.15-1.5
THROW DISTANCE 2.5 - 32.7 ft / .76 - 10 m	BRIGHTNESS (LUMENS) 5,000 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE HD (1920x1080)
RESOLUTION 1920 x 1080	BRIGHTNESS (LUMENS) 5,000 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 2.5 - 32.7 ft / .76 - 10 m
THROW RATIO 1.15-1.5	KEystone Vertical (+/- 40°)
LENS 1.3x Manual optical zoom / manual optical focus	LIGHT SOURCE (WATT) 370
LIGHT SOURCE LIFE, NORMAL (HOURS) 2000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 2500
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 5,000:1
ASPECT RATIO 16:9	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102KHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1200	MAC® RESOLUTION (MAX) 1920 x 1200

CONNECTOR	
USB 2.0 TYPE A 1	USB 2.0 TYPE B 1
ETHERNET LAN (RJ45) 1	3.5MM 12V TRIGGER 1
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 2
CONTROL (RS232) 1	HDMI 2
VGA IN 2	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	S-VIDEO IN 1
MINI USB 1	RCA AUDIO IN (L/R) 1
3D VESA 1	IR OUT 1

AUDIO	
INTERNAL SPEAKERS 10W (x2)	

POWER	
VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (MAX) 574W
STAND-BY <0.5W	

CONTROLS	
PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

OPERATING CONDITIONS	
----------------------	--

TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%
---	---

ADDITIONAL HARDWARE	
---------------------	--

KENSINGTON LOCK SLOT 1	
----------------------------------	--

WEIGHT (IMPERIAL)	
-------------------	--

NET (LBS) 13.7	GROSS (LBS) 18.7
--------------------------	----------------------------

WEIGHT (METRIC)	
-----------------	--

NET (KG) 6.2	GROSS (KG) 8.5
------------------------	--------------------------

DIMENSIONS (IMPERIAL) (WXHxD)	
-------------------------------	--

PACKAGING (IN.) 22.7 x 21.1 x 10.2	PHYSICAL (IN.) 18.5 x 12.4 x 5.5
--	--


DIMENSIONS (METRIC) (WXHxD)	
-----------------------------	--

PACKAGING (MM) 577 x 537 x 260	PHYSICAL (MM) 470 x 316 x 140
--	---

GENERAL	
AV CONTROL	REGULATIONS
AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	FCC, ROHS, cTUVus
PACKAGE CONTENTS	WARRANTY
PG800HD projector, power cable, VGA cable, remote control with AAA batteries, Quick Start Guide	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
RECYCLE/DISPOSAL	
Please dispose of in accordance with local, state or federal laws.	

DIMENSIONS

18.5 x 12.4 x 5.5 in / 470 x 316 x 140 mm

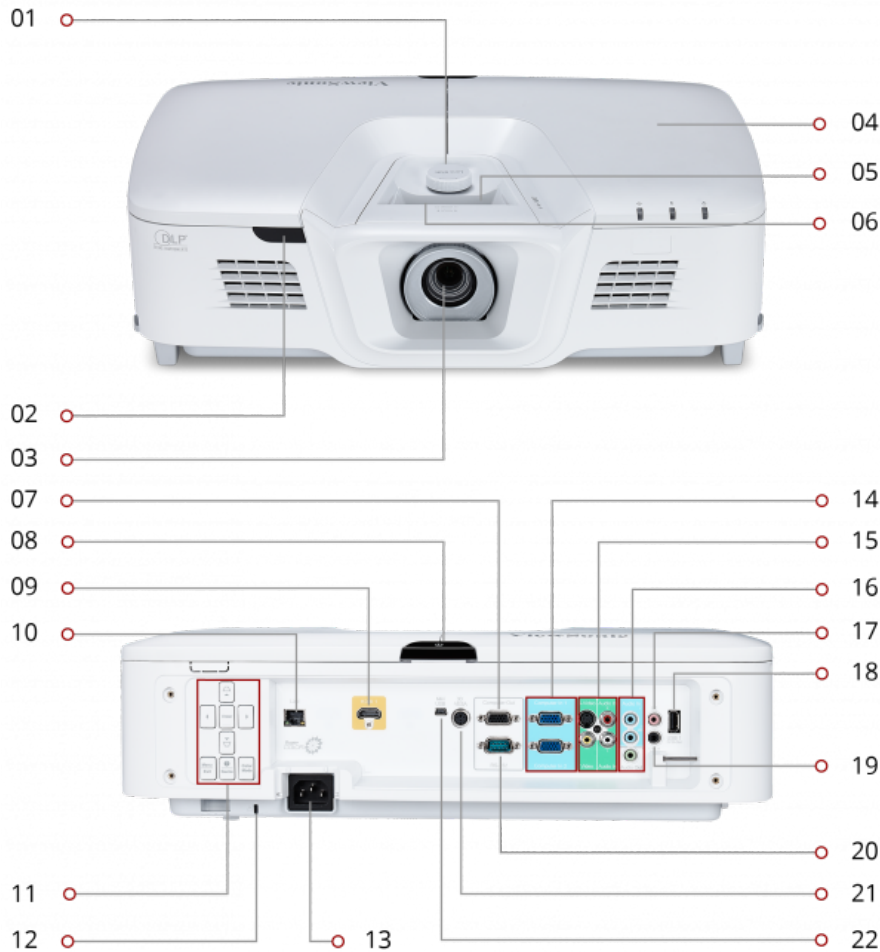

Vertical Lens Shift IR Remote Sensor Projection Lens PortAll™ (HDMI/MHL) Zoom ring Focus ring Monitor Out
 Power Switch HDMI LAN Menu Controls Kensington® Lock Slot AC In VGA (x2) Audio/Video In
 Audio In/Out IR Passthrough USB 12V DC Trigger RS232