

RESOLUTION 1024 x 768	THROW RATIO 1.96~2.15
THROW DISTANCE 3.90 - 43.01 ft / 1.19 - 13.11 m	BRIGHTNESS (LUMENS) 4,000 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE XGA (1024x768)
RESOLUTION 1024 x 768	BRIGHTNESS (LUMENS) 4,000 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 3.90 - 43.01 ft / 1.19 - 13.11 m
THROW RATIO 1.96~2.15	KEystone Vertical (+/- 40°)
LENS 1.1x optical zoom	LIGHT SOURCE (WATT) 240
LIGHT SOURCE LIFE, NORMAL (HOURS) 4000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15k~102kHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1080	MAC® RESOLUTION (MAX) 1920 x 1080

CONNECTOR	
ETHERNET LAN (RJ45) 1	3.5MM AUDIO OUT 1
3.5MM AUDIO IN 1	CONTROL (RS232) 1
HDMI 1	HDMI MHL 1
VGA IN 1	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	S-VIDEO IN 1
MINI USB 1	

AUDIO	
INTERNAL SPEAKERS 10W (x1)	

POWER	
VOLTAGE 100-240 VAC, 50-60Hz	CONSUMPTION (TYPICAL) 350W
STAND-BY <0.5W	

OPERATING CONDITIONS	
TEMPERATURE 32-104° F (0 - 40° C)	

WEIGHT (IMPERIAL)	
NET (LBS) 5.3	GROSS (LBS) 7.5


WEIGHT (METRIC)	
NET (KG) 2.4	GROSS (KG) 3.4

DIMENSIONS (IMPERIAL) (WXHxD)	
PACKAGING (IN.) 14.37 x 11.81 x 7.4	PHYSICAL (IN.) 11.57 x 8.58 x 4.33

DIMENSIONS (METRIC) (WXHxD)	
PACKAGING (MM) 365 x 300 x 188	PHYSICAL (MM) 294 x 218 x 110

GENERAL	
AV CONTROL AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	REGULATIONS FCC (including ICES003), cTUVus
PACKAGE CONTENTS PG703X projector, power cable, VGA cable, remote control, Quick Start Guide	WARRANTY Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
RECYCLE/DISPOSAL Please dispose of in accordance with local, state or federal laws.	

DIMENSIONS
11.57 x 8.58 x 4.33 in / 294 x 218 x 110 mm

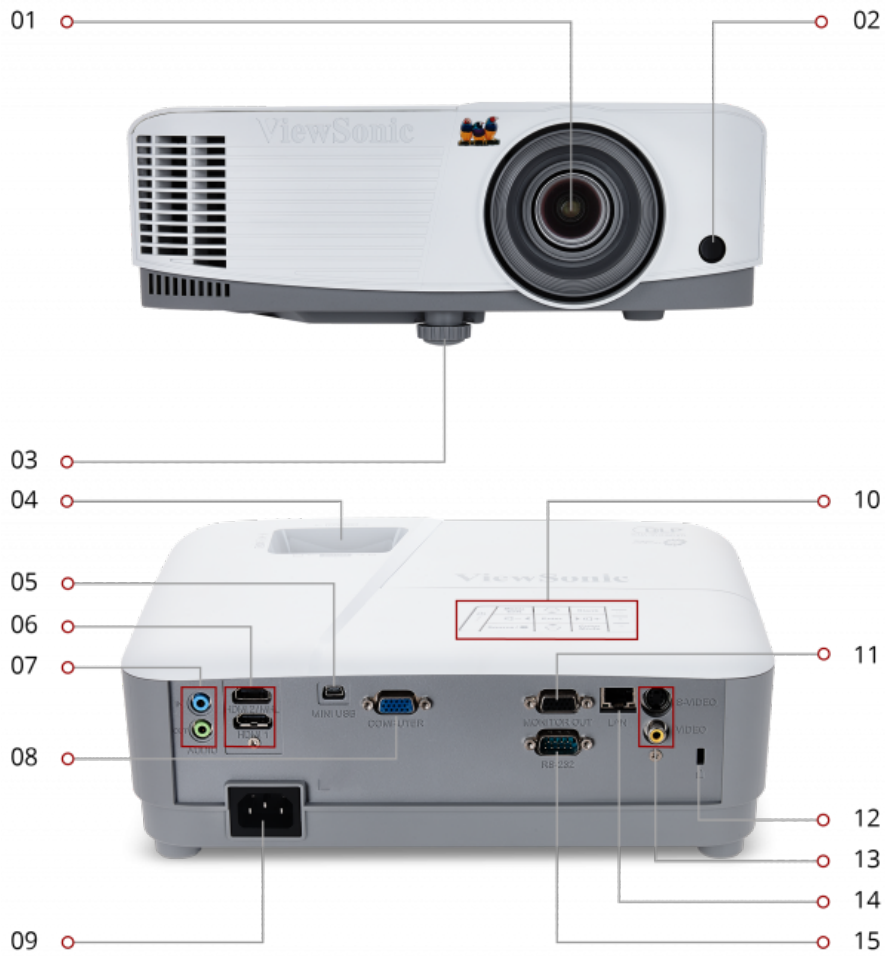

Projection lens IR remote sensor Elevation foot Focus / zoom rings USB type Mini B HDMI x2 (x1 MHL)
 Audio In/Out VGA AC In Control Panel Monitor Out Kensington® Lock Slot Video/S-Video In LAN (RJ45)

RS232