

RESOLUTION 1280 x 800	THROW RATIO 1.55~1.70
THROW DISTANCE 3.28 - 36.02 ft / .99 - 10.98 m	BRIGHTNESS (LUMENS) 3,600 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WXGA (1280x800)
RESOLUTION 1280 x 800	BRIGHTNESS (LUMENS) 3,600 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 3.28 - 36.02 ft / .99 - 10.98 m
THROW RATIO 1.55~1.70	KEystone Vertical (+/- 40°)
LENS 1.1x optical zoom	LIGHT SOURCE (WATT) 200
LIGHT SOURCE LIFE, NORMAL (HOURS) 5000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102KHz	FREQUENCY VERTICAL 23~120MHz

COMPATIBILITY	
PC RESOLUTION (MAX) VGA(640 x 480) to FullHD(1920 x 1080)	MAC® RESOLUTION (MAX) VGA(640 x 480) to FullHD(1920 x 1080)

CONNECTOR	
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 1
CONTROL (RS232) 1	HDMI 1
VGA IN 2	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	MINI USB 1

AUDIO	
INTERNAL SPEAKERS 2W (x1)	

POWER	
VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 260W
STAND-BY <0.5W	

OPERATING CONDITIONS	
TEMPERATURE 32-104° F (0 - 40° C)	

WEIGHT (IMPERIAL)	
NET (LBS) 4.9	GROSS (LBS) 7.1

WEIGHT (METRIC)	
NET (KG) 2.2	GROSS (KG) 3.2

DIMENSIONS (IMPERIAL) (WXHxD)	
PACKAGING (IN.) 14.4 x 7.4 x 11.8	PHYSICAL (IN.) 11.6 x 4.3 x 8.6


DIMENSIONS (METRIC) (WXHxD)	
PACKAGING (MM) 365 x 188 x 300	PHYSICAL (MM) 294 x 110 x 218

GENERAL	
REGULATIONS FCC (including ICES003), cTUVus, NOM, TUV-Rheinland S Mark	PACKAGE CONTENTS PA503W projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide
WARRANTY Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).	RECYCLE/DISPOSAL Please dispose of in accordance with local, state or federal laws.

DIMENSIONS

11.57x 8.58 x 4.33 in / 294 x 218 x 110 mm



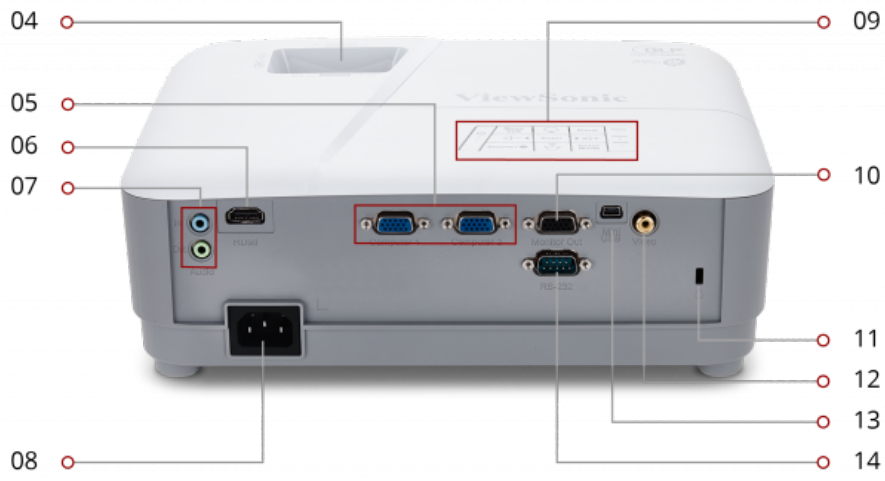

Projection lens IR remote sensor Elevation foot Focus / zoom rings VGA x2 HDMI Audio In/Out AC In
 Control Panel Monitor Out Kensington® Lock Slot Video In USB type Mini B RS232